


Specifications Cordstrap AnchorLash® 105.3

Performance Specifications	
Solution Breaking Strength*	9.000 daN / 19,800 lbf (±10%)
Solution MSL	6.750 daN / 14,850 lbf (±10%)
Certification	Maritem, Eurosafe, DNV-GL witnessed

Specifications Cordstrap AnchorLash 105.3	
Construction & Dimensions	Three horizontal woven lashings joined by 3 buckles. Each lashing has a stitched soft loop at the end to secure it to the container anchor point.
Designed for	Rigid packaging, Soft packaging, Drums, IBC's, FIBC's (big bags)
Horizontal Element Woven Lashing	
- Length (red)	4.5 meter / 14.8' (±2%) – 2 pieces
- Length (orange)	5.5 meter / 18' (±2%) – 2 pieces
- Length (white)	7.5 meter / 24.6' (±2%) – 2 pieces
- Width	32 mm / 1.25" (±5%)
- Elasticity	≤ 9%
Heavy duty buckle	
- Width	35 mm / 1,4"(±5%)
	
Packaging	
Pieces per Box	PalletBox: 115 SmallBox: 8
Box Weight	PalletBox: 291 kg / 642 lbs SmallBox: 20 kg / 44 lbs
Box Dimensions	PalletBox: 1200 x 800 x 776 mm SmallBox: 400 x 400 x 250 mm
Item number	PalletBox: 7256935 SmallBox: 7256930
Material	
Lashing	High tenacity polyester filament yarn
Buckle	Silver zinc coated dropforged steel buckle
Packaging	The solution is packed in a plastic bag (recycling 4) and corrugated fiberboard (recycling code 20)

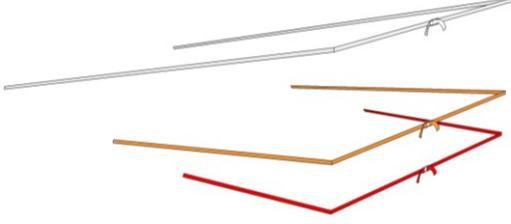

Represented in over 50 countries

World market leader

ISO 9001 certified

Manufacturer & supplier since 1965

Offering genuine customer solutions

Specialist advice

Continued product development

Training at Cordstrap Training Centers

Quality assurance

Recommended Tensioner(s)		
<p>Battery Tensioner CBT 35</p> <p>Product Code EU Type (incl. charger, 2 batteries) 7850001</p> <p>Product Code US Type (incl. charger, 2 batteries) 7580021</p> <p>Product Code Global Type (incl. 2 batteries) 7580031</p> <p>Product Code Global Type (incl. charger) 7580051</p>	<p>Pneumatic Tensioner CT 35 PN</p> <p>Product code 7567000</p>	<p>Manual Tensioner CT 40 (2)</p> <p>Product code 7502400</p>

Recommended Accessories		
<p>Container Magnets</p> <p>Packaging 2 pieces per box</p> <p>Product Code 7555000</p>	<p>Applicator Tool</p> <p>Packaging 1 piece per box</p> <p>Product Code 7608200</p>	<p>Cargo protection</p> <p>Vertical hang Strap</p> <p>Retainer buckles</p> <p>Reefer lashing point</p> <p>*see more information in Add-Ons Commercial spec. sheet to find products for supporting your application</p>

Links to instruction sheet						
						
Steel drums	Plastic drums	IBC's	Soft packaging	Small big bags	High big bags	Crates/boxes
						

We recommend storing all Cordstrap Products in a cool and dry environment out of direct sunlight and between -5°C and 40°C / 23°F and 104°F.

All information provided is based on accuracy at time of creation.



Represented in over 50 countries

World market leader

ISO 9001 certified

Manufacturer & supplier since 1965

Offering genuine customer solutions

Specialist advice

Continued product development

Training at Cordstrap Training Centers

Quality assurance